


Backwater valve Staufix DN 200, Floor slab, tileable, Type 1

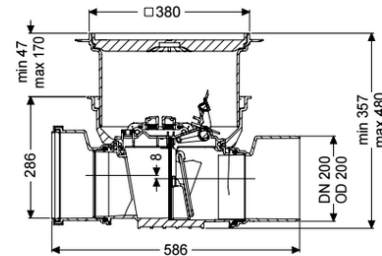

Article information

Item no.: 720200.10X
 GTIN: 4026092076132
 Price group: 10

Advantages

- Simple conversion to Staufix Type 2 or StaufixControl
- Flexible installation, various covers available for floor slab installation
- Simple, toolless maintenance and cleaning

Description

The backwater valve for wastewater without sewage is equipped with one mechanical flap which closes automatically in the event of backwater and also serves as an emergency closure to be closed by hand. Thanks to the modular KESSEL system, existing systems can easily be supplemented by a second flap or be converted to the StaufixControl backwater valve.

Variant

Emergency closure: yes
 Mechanical backwater flaps: 1

General characteristics

Colour: black
 Standard: EN 13564
 Nominal size (DN): 200
 Outer diameter (OD): 200 mm
 Note on nominal size: Hydraulics correspond to DN 150
 Type of wastewater: without sewage
 Installation situation: floor slab installation
 Delivery state: Installation-ready (connection parts must be connected on site)
 Backwater protection: Type 1

Dimensions

| | |
|--|-------------------------------------|
| Net weight: | 8,3 kg |
| Gross weight: | 10,9 kg |
| Groundwater resistant from lower edge of base section: | 3 mm |
| Cutout dimension, width: | 750 mm |
| Cutout dimension, length: | 750 mm |
| Vertical drop between inlet and outlet: | 8 mm |
| Installation depth: | 341 - 464 mm |
| Vertical adjustment: | vertically adjustable upper section |
| Length: | 586 mm |
| Width: | 444 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

Coverage features

| | |
|-----------------------|-------------------------|
| Type of cover: | tileable cover plate |
| Cover material: | Polymer |
| Width of cover: | 366 mm |
| Length of cover: | 366 mm |
| Cover locking: | Lock & Lift |
| Load class: | K 3 (EN 1253-1) |
| Tightness: | surface water resistant |
| Max. flooring height: | 16 mm |